

Features

- > electronic ballast for one-lamp operation
- > to be used with four-wire lamps
- > preheat start
- > status forwarding
 - potential free relay contacts for lamp on / lamp fault
 - relay activated: lamp on
- > relay contacts:
 - potential free, load: 50~500mA at 24~277V AC
 - 50~500mA at 5~30V DC




EPS200W/1.2A

Technical Data


Lamp power:	100~200W
Lamp type:	GPHA1000T5L, GPHA1554T5L
Lamp current:	1.10~1.30A

Mains voltage:	99~264VAC 50/60Hz
Efficiency:	>90%
Operating frequency:	25~60KHz
Power factor:	>0.9 typ.
Ambient temperature:	0~40°C
Tc-temperature:	Max. 70°C
Dimensions:	249X65X40mm
Weight:	0.60Kg

Dimensions

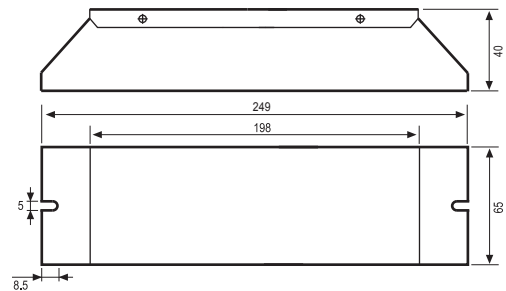

Wiring Diagram

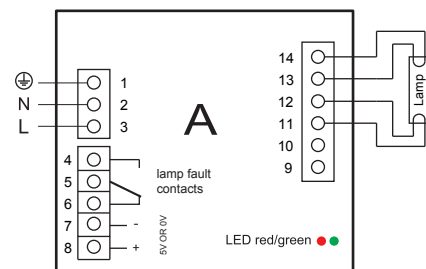

Mounting Restrictions

- Wire gauge: 0.5-1.5mm², strip length: 8mm
- Disconnect input power before installing or servicing
- Ballast case must be grounded
- Don't short any two wires of the input and output wires
- For indoor use only
- Max. Cable length between the ballast and lamp: 5.0m

Part Number: 810200001